


TC-35i Modem for Tramigo fleet software.


Package contents:




1x Siemens TC-35i modem

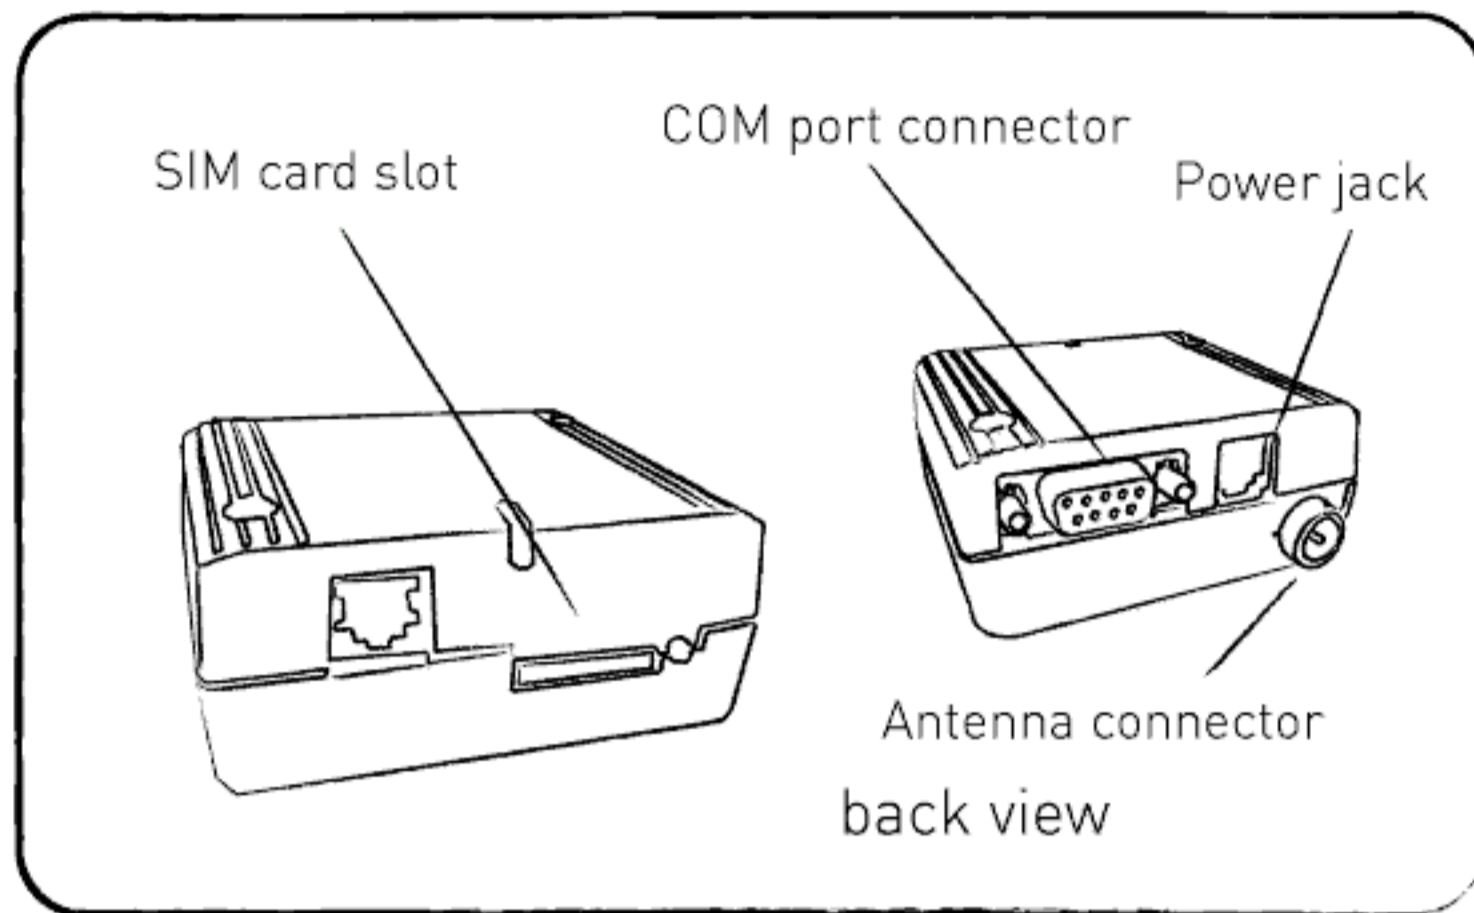


1x Driver disk

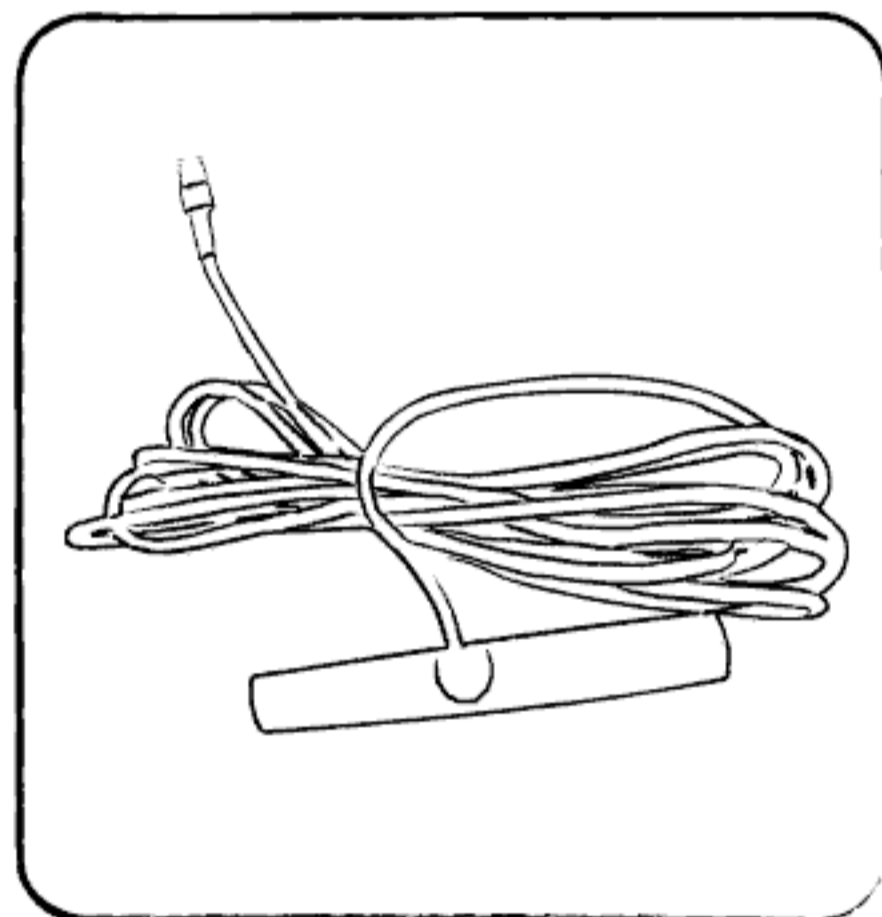


1x TC-35i GSM
antenna

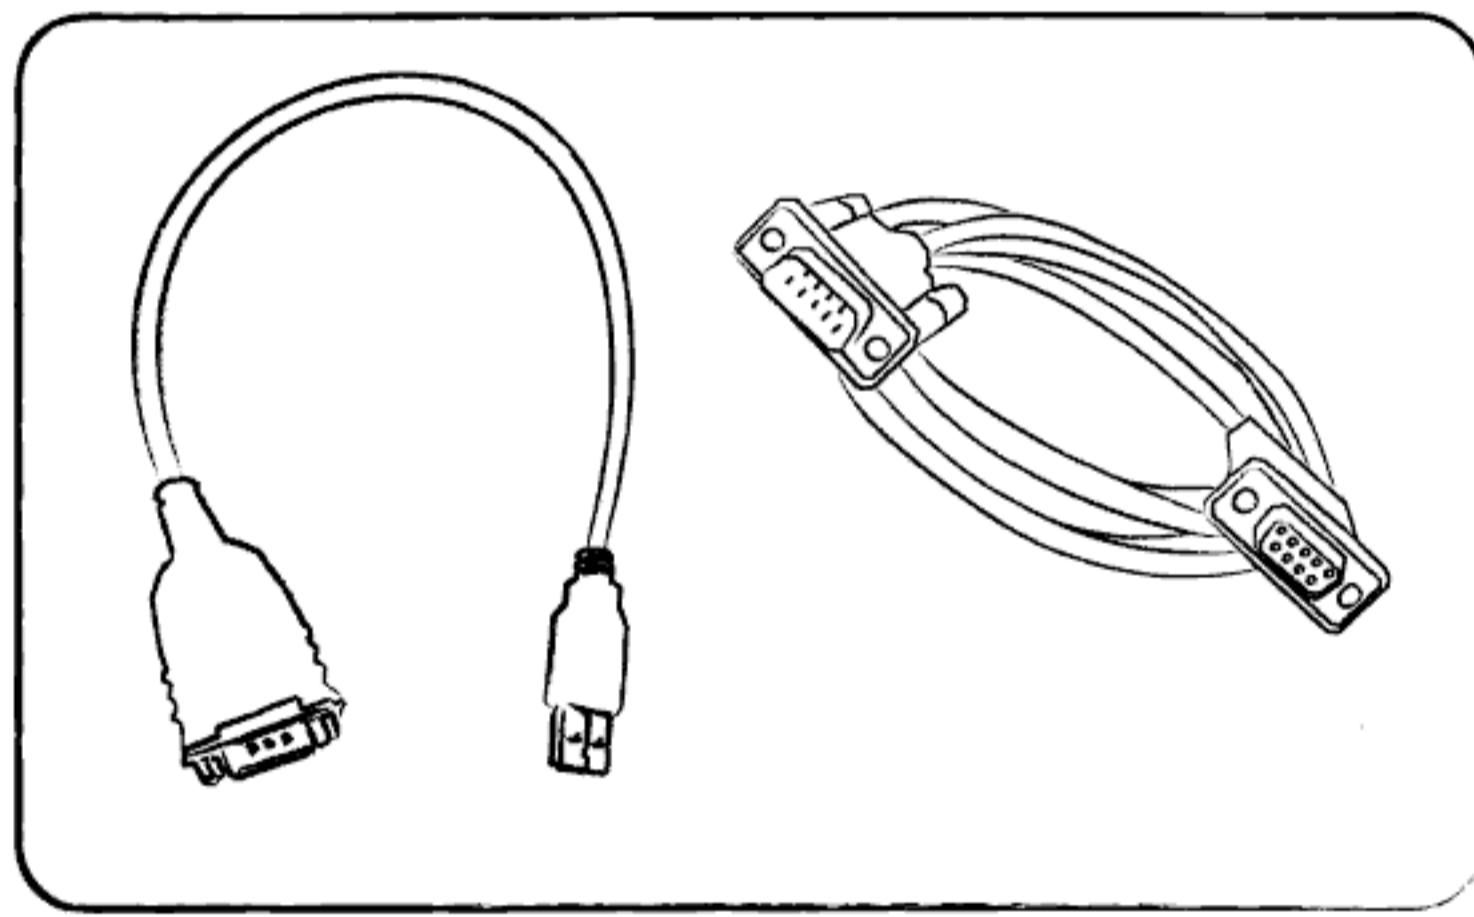

1x 9 pin serial cable and 1x - USB
adaptor cable

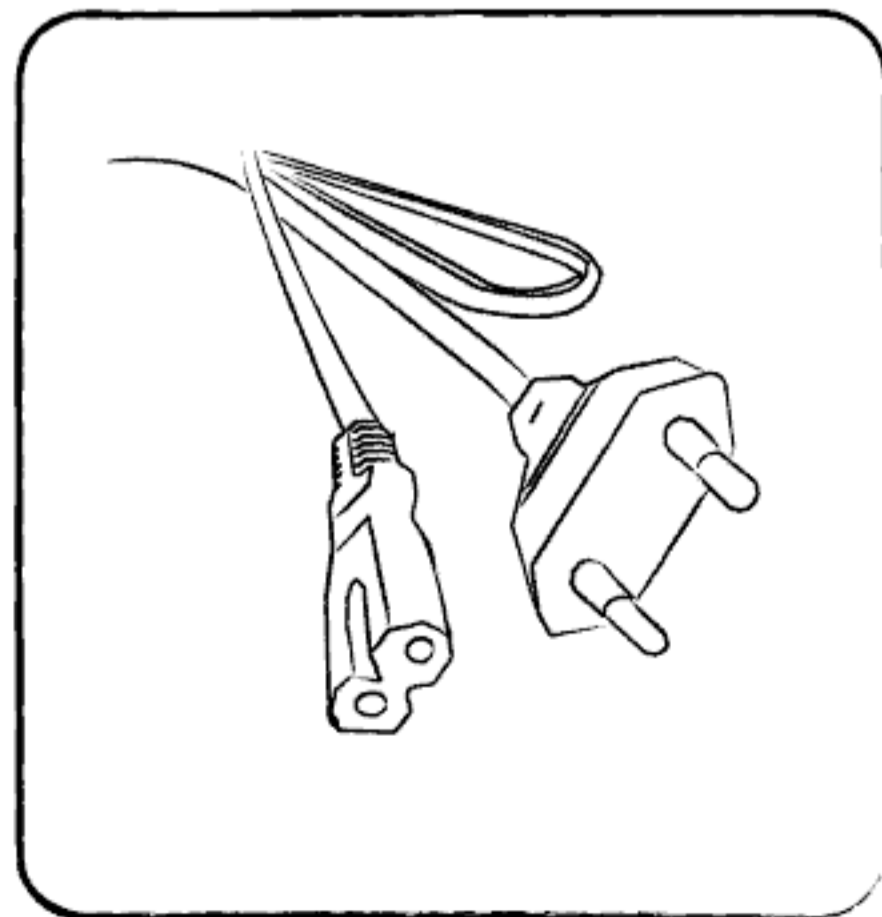


1x power supply cable

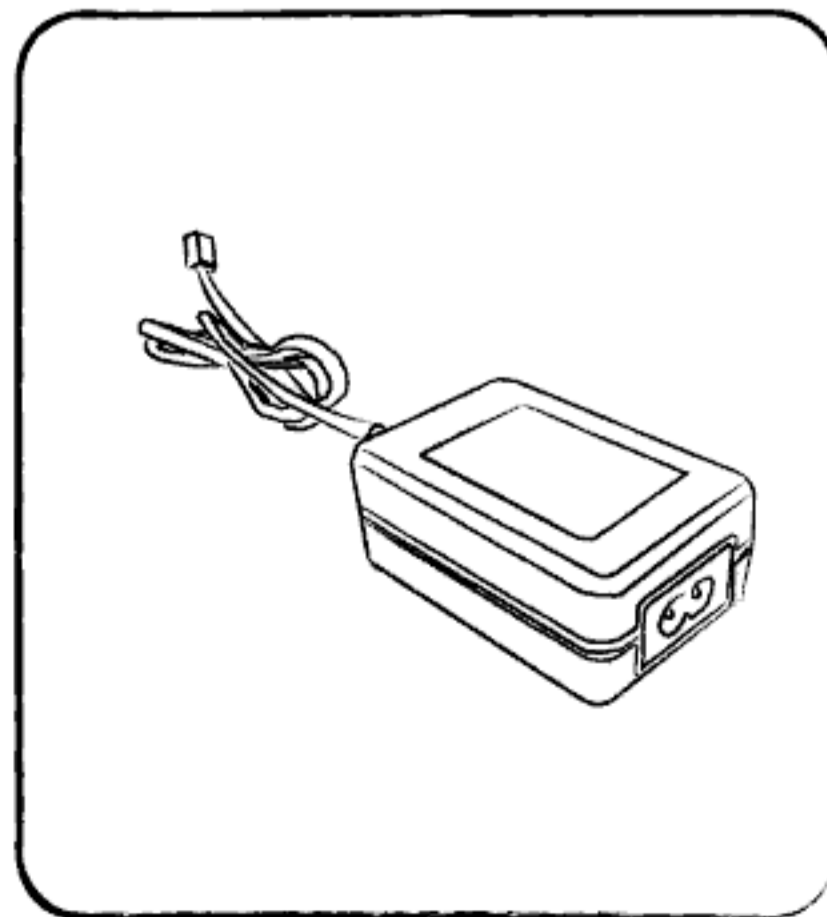


1x power supply

TC-35i Modem Installation for desktop computers.

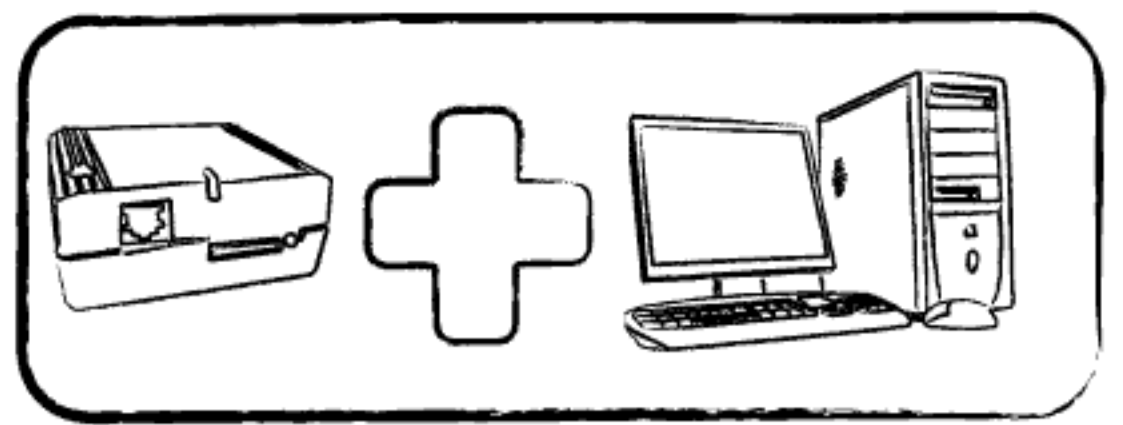


1

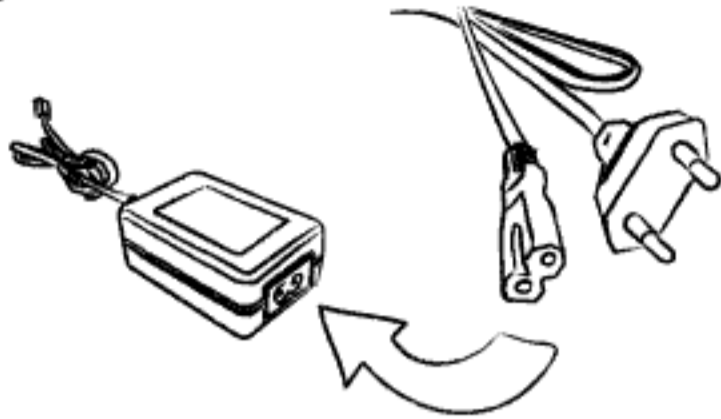


Connect power cord to power supply

2

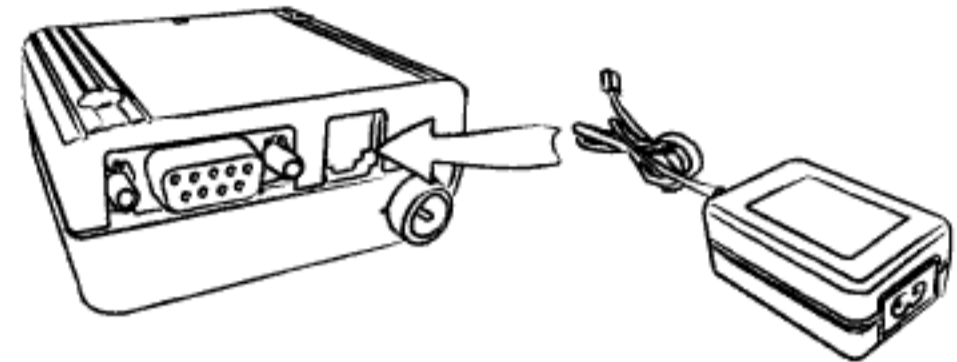


Connect power supply to the rightmost slot in the TC-35i.

3

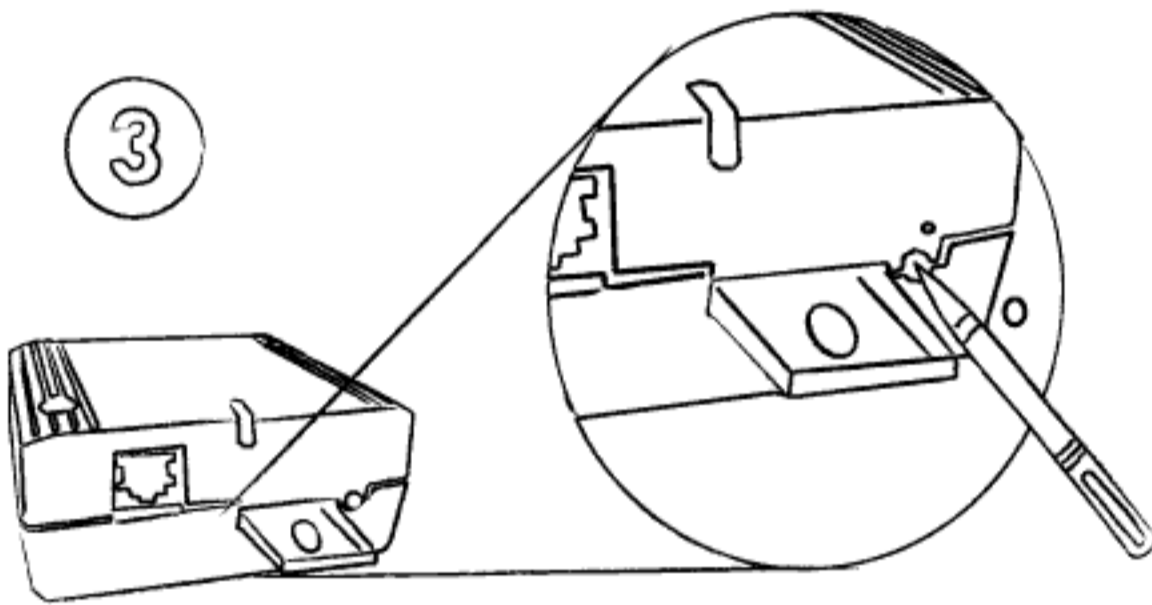


Open the SIM card slot by pressing the yellow button with a pointed object.

4

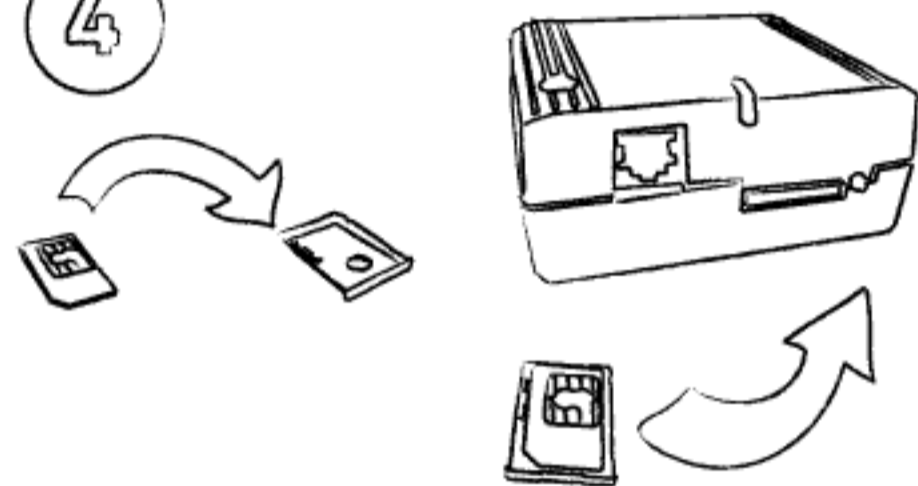


Install SIM with chip facing UP into the modem card slot.

5

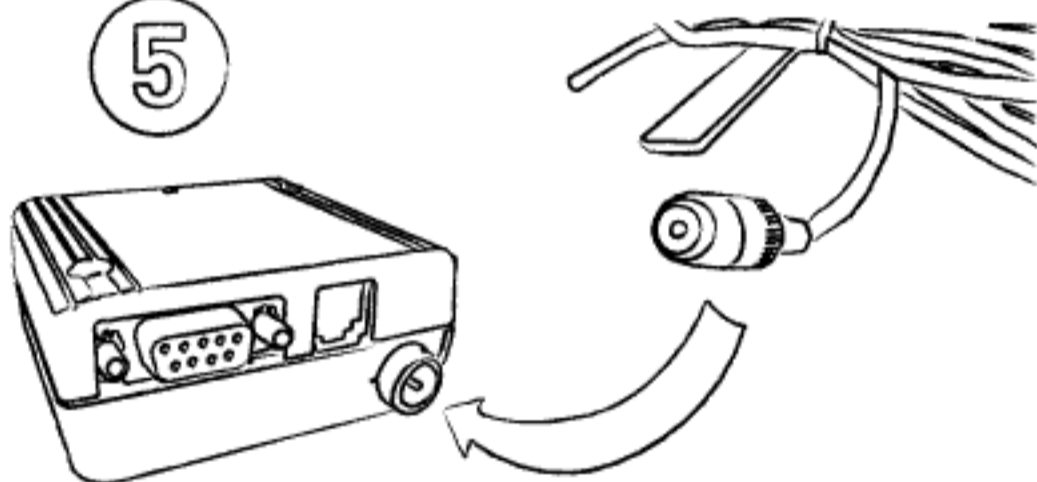


Attach and screw on the Antenna.

6

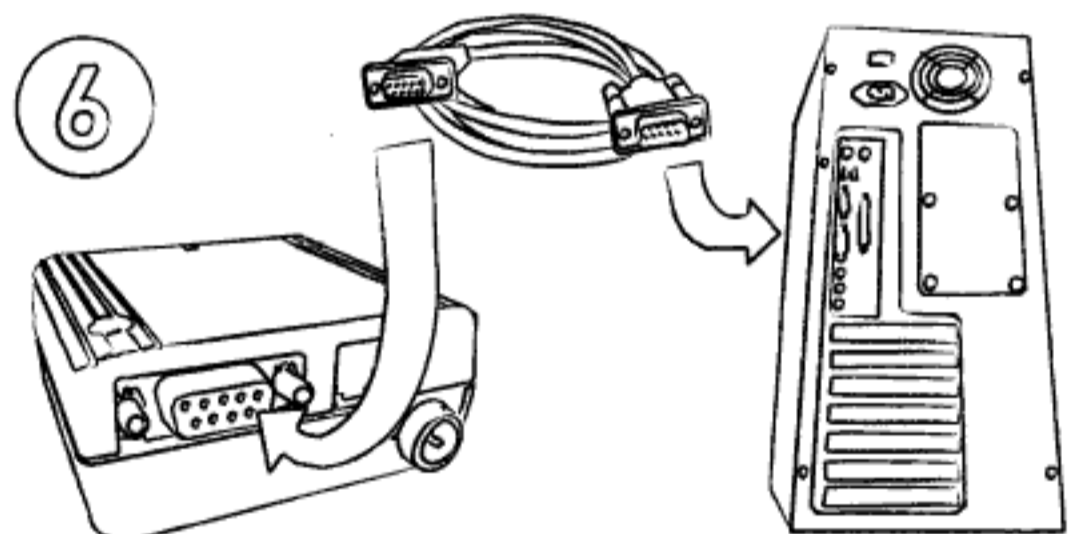


Connect the modem cable to the PC Com port and the TC35i serial port.

7

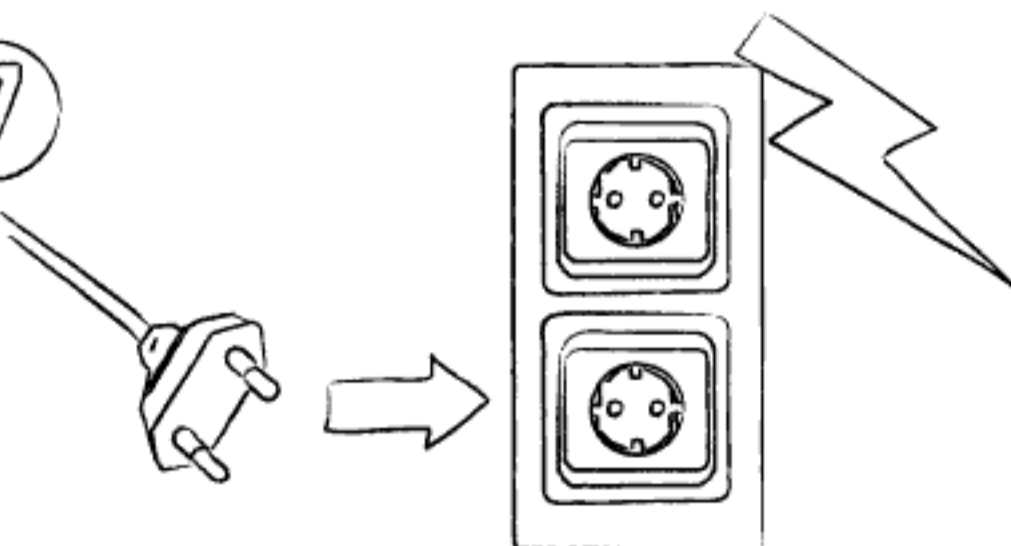



Plug in the power cable to an electric-ity socket.

8

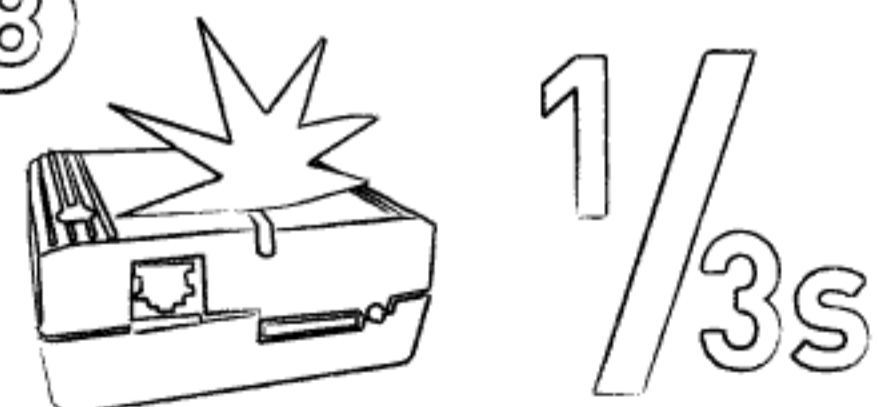


Observe the light. It should soon start blinking once every 3 seconds.

TC-35i Modem Installation for laptop computers.

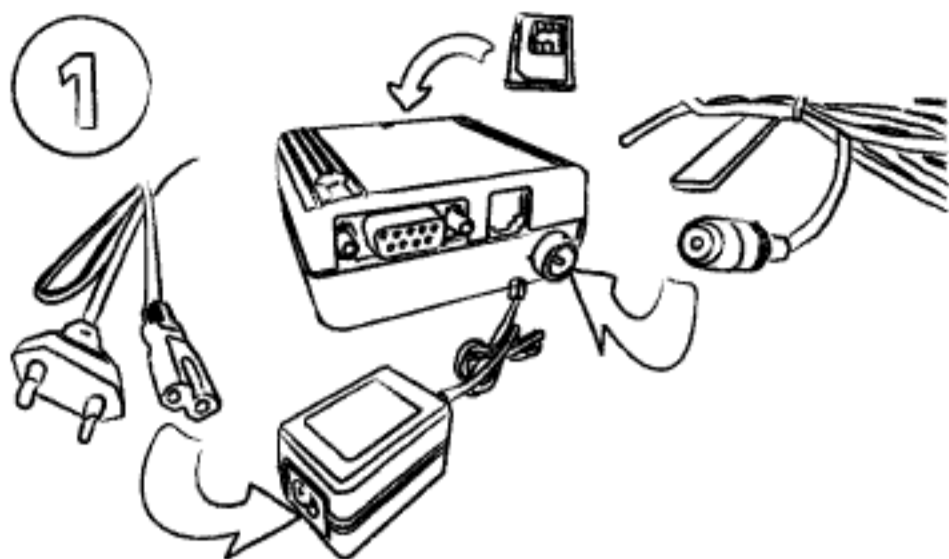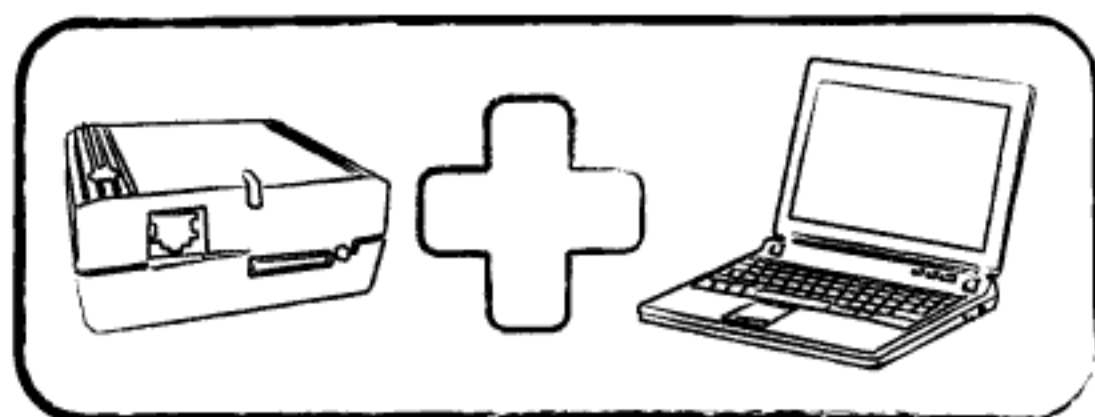

1 Setup TC-65 as in tabletop installation steps 1-5.

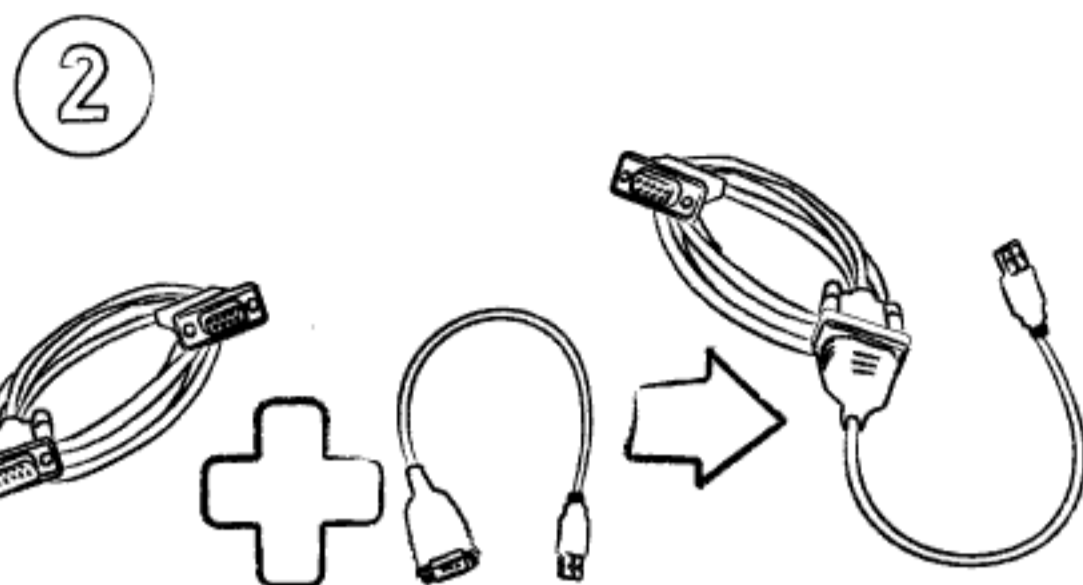


2 Connect the USB adaptor cable to the 9-pin modem cable.




3 Insert the driver disk into the CD-Rom drive.




4 Select your operating system and choose the drivers for serial to USB.

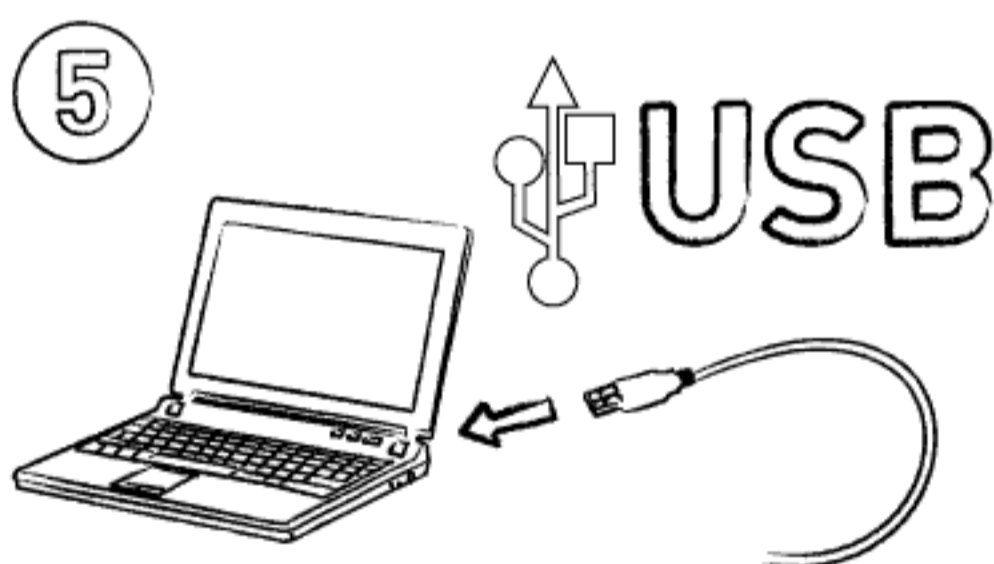


5 Connect the serial-USB adaptor to your USB port.

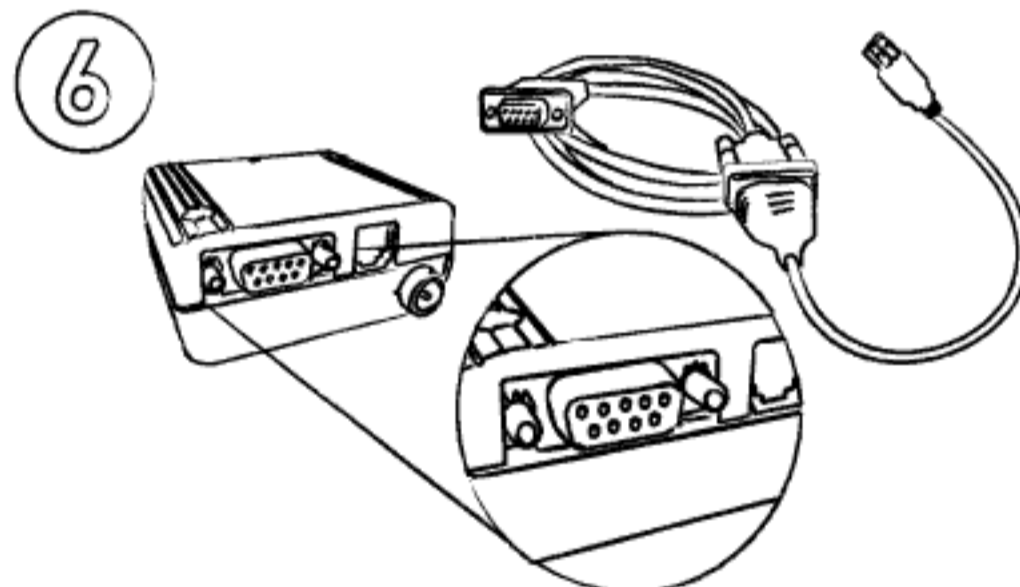

6 Connect the other end of the modem cable to your TC-35i Modem.

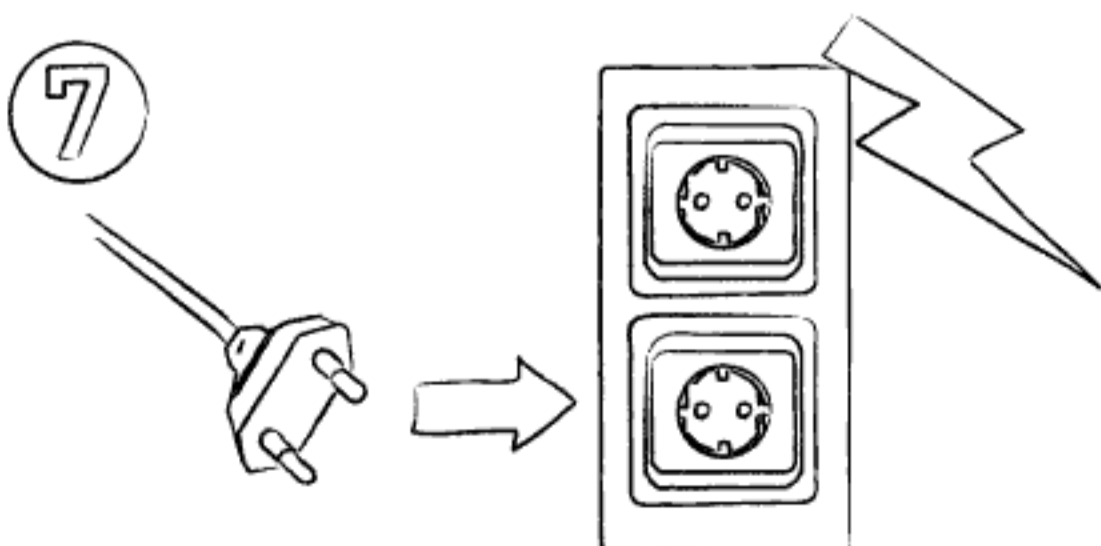

7 Plug in the power cable to an electricity socket.

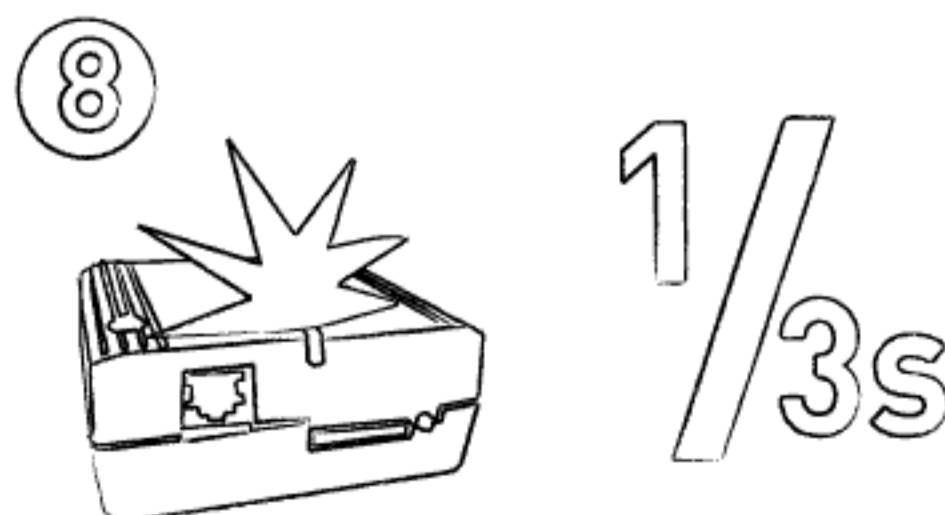

8 Observe the light. It should soon start blinking once every 3 seconds.